




# HELIX II HX01


TECHNICAL SUMMARY & NIJ DATA

THREAT LEVEL  
**II**

STANDARD	NIJ 0101.06
NIJ MODEL	UG2F06-F
SERIES	HX01
THREAT LEVEL	II
GENDER	Structured Female
AREAL DENSITY	0.83 psf
THINNESS	0.18"
PLY COUNT	31
SIZE RANGE	C1-C5
COMPOSITION	Spectra Shield®/Goldshield® Hybrid
STITCHING	Shoulder Tack, Bottom Stitch
PANEL COVER	70 Denier Ripstop Nylon, Poly-backed, Ultra-Sonic Seams
DESICCANT	Patented ProTect® Material
WARRANTY	5 Years

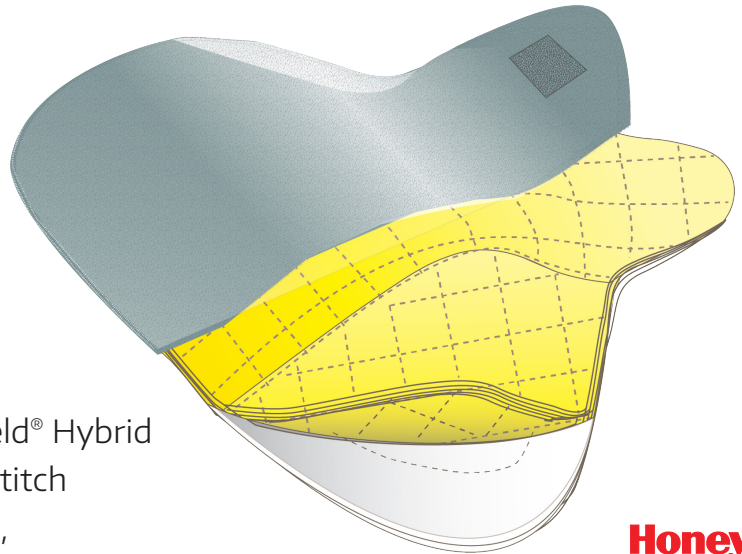

**Honeywell**



### BALLISTIC PERFORMANCE AT CERTIFICATION

9mm New V50	1591 fps	.357 Mag New V50	1575 fps
9mm Conditioned V50	1660 fps	.357 Mag Conditioned V50	1651 fps
9mm BFS	27.7 mm	.357 Mag BFS	30.7 mm
9mm New RPI	1916.9	.357 Mag New RPI	1897.6
9mm Conditioned RPI	2000.0	.357 Mag Conditioned RPI	1989.2

### SPECIAL THREAT TESTING

.357 SIG 125gr GDHP

Special threat testing conducted at NIJ certified independent laboratory



1 Sentry Drive | PO Box 280 | Dover, TN 37058  
(866) 920-5940 | [www.gharmorsystems.com](http://www.gharmorsystems.com)

**READY IS THE ONLY OPTION.**