




HELIX IIIA HX02

TECHNICAL SUMMARY & NIJ DATA

THREAT
LEVEL
IIIA

STANDARD	NIJ 0101.06
NIJ MODEL	GPAIIIA-2
SERIES	HX02
THREAT LEVEL	IIIA
GENDER	Male
AREAL DENSITY	1.00 psf
THINNESS	0.35"
PLY COUNT	30
SIZE RANGE	C1-C5
COMPOSITION	Kevlar®/Spectra Shield®/Dyneema® Hybrid
STITCHING	"X" and Perimeter Stitch, Shoulder Tack
PANEL COVER	200 Denier Ripstop Nylon, Poly-backed, Ultra-Sonic Seams
DESICCANT	Patented ProTect® Material
WARRANTY	5 Years

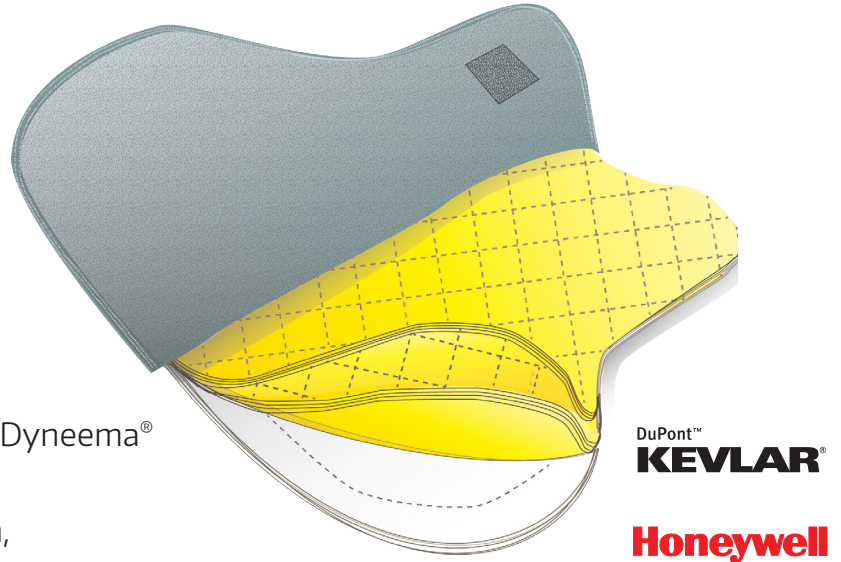

BALLISTIC PERFORMANCE AT CERTIFICATION

.357 Sig New V50	1805 fps	.44 Mag New V50	1594 fps
.357 Sig Conditioned V50	1905 fps	.44 Mag Conditioned V50	1609 fps
.357 Sig BFS	28.2 mm	.44 Mag BFS	39.5 mm
.357 Sig New RPI	1805.0	.44 Mag New RPI	1594.0
.357 Sig Conditioned RPI	1905.0	.44 Mag Conditioned RPI	1609.0

SPECIAL THREAT TESTING

9mm 127gr SXT +P+ RA9TA | .357 SIG 125gr GDHP | 5.7 x 28mm FN SS195LF 28gr
 Special threat testing conducted at NIJ certified independent laboratory



1 Sentry Drive | PO Box 280 | Dover, TN 37058
 (866) 920-5940 | www.gharmorsystems.com

READY IS THE ONLY OPTION.