




# ProX IIIA PX03


TECHNICAL SUMMARY & NIJ DATA

THREAT LEVEL  
**IIIA**

STANDARD	NIJ 0101.06
NIJ MODEL	BA-3A00S-MR01F
SERIES	PX03
THREAT LEVEL	IIIA
GENDER	Structured
AREAL DENSITY	1.26 psf
THINNESS	0.26"
SIZE RANGE	C1-C5
COMPOSITION	Honeywell® Gold Shield® 2117, Honeywell® Gold Flex®, Teijin Twaron®
PANEL COVER	2 Ply, 70 Denier Textured Nylon Ripstop with TPU Lamination System
WARRANTY	5 Years

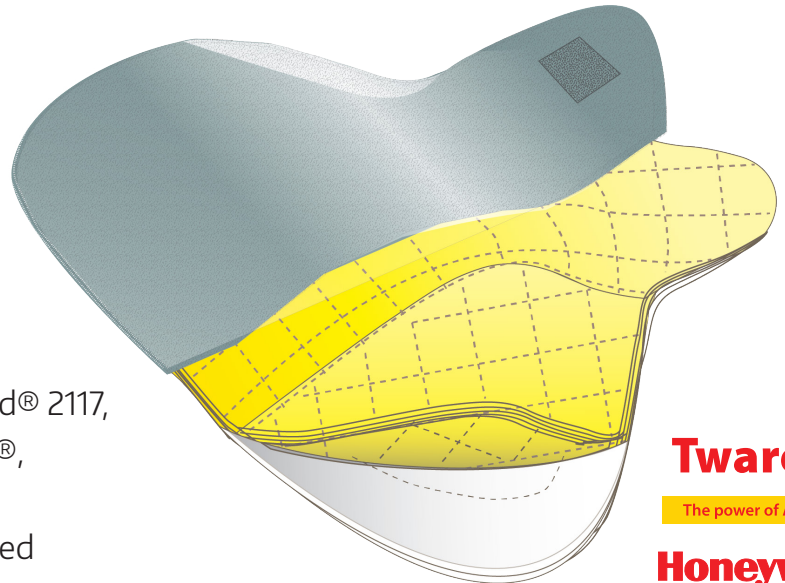

**Twaron®**  
The power of Aramid  
**Honeywell**



## BALLISTIC PERFORMANCE AT CERTIFICATION

.357 Sig New V50	1822 fps	44 Mag New V50	1677 fps
.357 Sig Conditioned V50	1791 fps	.44 Mag Conditioned V50	1626 fps
.357 Sig BFS	28.05 mm	.44 Mag BFS	37.01 mm
.357 Sig New RPI	1446.0	.44 Mag New RPI	1330.9
.357 Sig Conditioned RPI	1421.4	.44 Mag Conditioned RPI	1290.5

## SPECIAL THREAT TESTING

9mm 127 gr. +P+ SXT | FN 5.7x28 27 Gr. JHP | FN 5.7x28 40 gr. V-Max

7.62x25mm 85Gr. FMJ Romanian Tokarev

Special threat testing conducted at NIJ certified independent laboratory



1 Sentry Drive | PO Box 280 | Dover, TN 37058  
(866) 920-5940 | www.gharmorsystems.com

**READY IS THE ONLY OPTION.**